

DATA SHEET

BH-115

Description: 3 ply carboxylated nitrile, rough top cover, fabric bottom

Applications: Corrugated box industry: folder belts, folder rails, counter ejectors, stackers

Additional Applications: Many uses in general conveying where the extra abrasion resistance of the carboxylated nitrile rubber is needed.

Features: Heavy 3 ply (225#) carcass, carboxylated nitrile rough top cover for optimum abrasion resistance.

Technical Data:

Overall Thickness: 0.3125 inches / 8.0 mm

Minimum Pulley Diameter: 3.0 inches / 75 mm

Reccomend Maximum Working Tension: 225.0 lbs per inch / 40.0 N per mm


Operating Temperature Range: 40° to 250° F (18° to 121° C)

Coefficient of Friction vs Steel - Cover: 1.2 μ Pulley: 0.3 μ

Color: Cover - Blue / Pulley - Tan

Maximum Width: 72 inches / 1830 mm

Recommended Joining Methods: Clipper or Alligator Lacing. Also possible to join with overlapped splice.

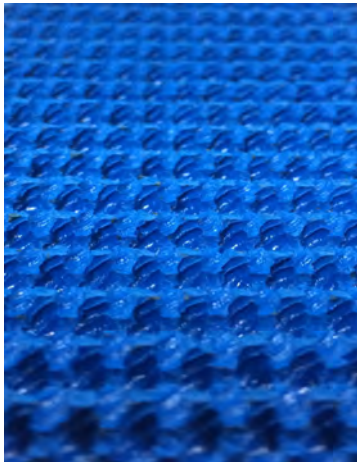

CONVEYING SURFACE

BELT DIRECTION
OF TRAVEL



PULLEY SIDE

BOWMAN HOLLIS MFG.
WWW.BOWMANHOLLIS.COM

NORTH CAROLINA
2925 OLD STEELE CREEK ROAD
CHARLOTTE, NC 28208
TOLL FREE: 888-269-2358
LOCAL: 704-374-1500
FAX: 704-333-5520

GEORGIA
1606 ORCHARD HILL RD
LaGRANGE, GA 30240
TOLL FREE: 800-822-64838
LOCAL: 706-882-6483
FAX: 706-882-7697