

DATA SHEET

BH-117

Description: 2 ply domestic belt, rough top cover, fabric bottom

Applications: Inclines and general distribution center belt

Features: Nitrile rubber, rough top cover

Technical Data:

Overall Thickness: 0.256 inches / 6.5 mm

Minimum Pulley Diameter: 4.0 inches / 102 mm

Pull for 2% Elongation: 160.0 lbs per inch / 28.0 N per mm


Tensile (breaking) Strength: 1600 lbs per inch / 280 N per mm

Coefficient of Friction vs Kraft Board - Cover: 1.0 μ

Color: Black

Maximum Width: 72 inches / 1830 mm

Recommended Joining Methods: Clipper or Alligator Lacing.

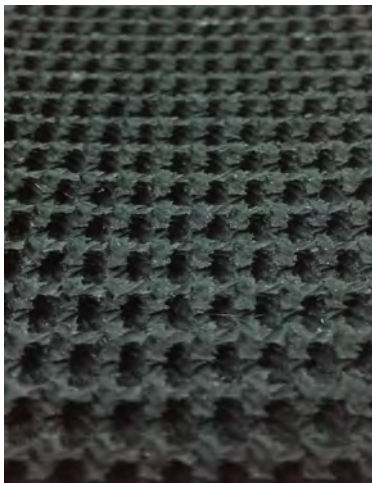

CONVEYING SURFACE

BELT DIRECTION
OF TRAVEL



PULLEY SIDE

BOWMAN HOLLIS MFG.
WWW.BOWMANHOLLIS.COM

NORTH CAROLINA
2925 OLD STEELE CREEK ROAD
CHARLOTTE, NC 28208
TOLL FREE: 888-269-2358
LOCAL: 704-374-1500
FAX: 704-333-5520

GEORGIA
1606 ORCHARD HILL RD
LaGRANGE, GA 30240
TOLL FREE: 800-822-64838
LOCAL: 706-882-6483
FAX: 706-882-7697