

DATA SHEET

BH-121

Description: Non-woven domestic belt, polyester fabric impregnated with PVC

Applications: General distribution center belt

Features: Easy tracking, cut resistant, low noise belt

Technical Data:

Overall Thickness: 0.10 inches / 2.5 mm

Minimum Pulley Diameter: 1.6 inches / 40 mm

Pull for 1% Elongation: 69.0 lbs per inch / 12.0 N per mm

Maximum Admissible Strength: 120 lbs per inch / 21 N per mm

Coefficient of Friction vs Kraft Board - Cover: 0.3 μ

Color: Black


Maximum Width: 72 inches / 1830 mm

Recommended Joining Methods: Clipper or Alligator Lacing.



CONVEYING SURFACE

BELT DIRECTION
OF TRAVEL

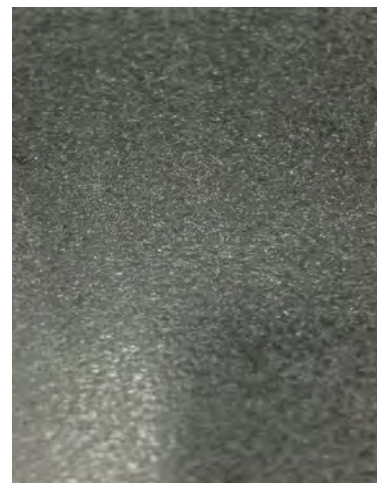

PULLEY SIDE

BOWMAN HOLLIS MFG.
WWW.BOWMANHOLLIS.COM

NORTH CAROLINA
2925 OLD STEELE CREEK ROAD
CHARLOTTE, NC 28208
TOLL FREE: 888-269-2358
LOCAL: 704-374-1500
FAX: 704-333-5520

GEORGIA
1606 ORCHARD HILL RD
LaGRANGE, GA 30240
TOLL FREE: 800-822-64838
LOCAL: 706-882-6483
FAX: 706-882-7697