



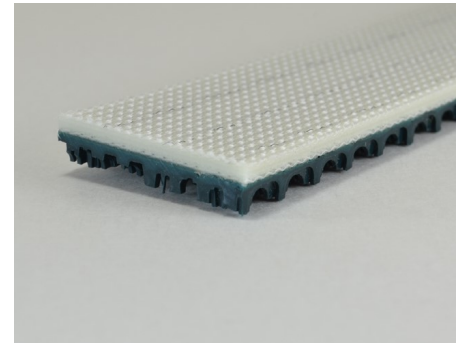

BH-105

Data Sheet

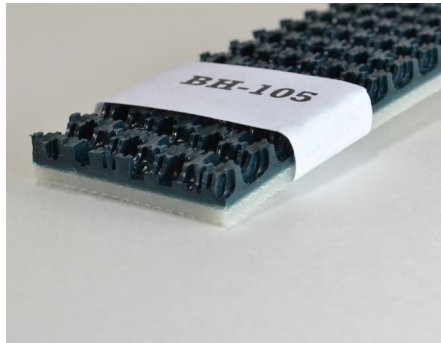

Description: 2 ply European belt, fabric bottom, sine wave PVC rough top

Applications: General conveying, inclines

Features: Anti-static, rough top cover, monofilament carcass

Overall Thickness	0.22 inches / 5.5mm
Minimum Pulley Diameter	2.4 inches / 60 mm
Color	Green
Tensile Strength	51.0 lbs per in / 8.9 N per mm
Cover/carcass material	PVC/PE
Joining	Finger splice, lacing

NORTH CAROLINA

**2925 OLD STEELE
CREEK ROAD
CHARLOTTE, NC 28208
888-269-2358**

GEORGIA

**1606 ORCHARD HILL RD
LaGRANGE, GA 30240
800-822-64838**

WWW.BOWMANHOLLIS.COM