



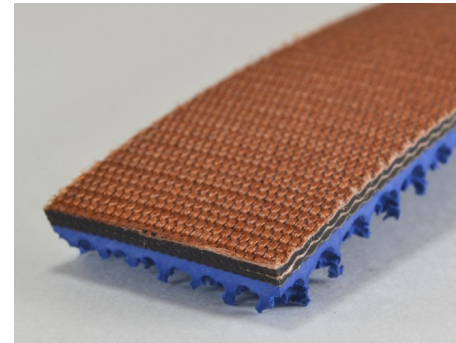

BH-115

Data Sheet

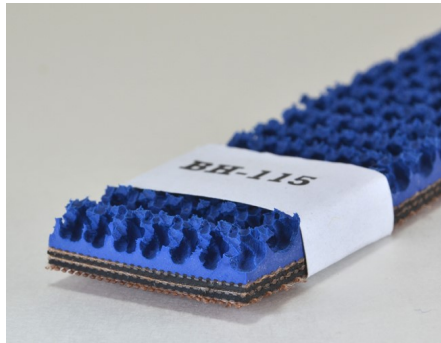

Description: 3 ply carboxylated nitrile roughtop belt

Applications: Corrugated box folder belt, stacker, counter/ejector, shingle

Features: Heavy 3 ply, optimum abrasion resistance

Overall Thickness	0.31 inches / 7.8 mm
Minimum Pulley Diameter	3.0 inches / 75 mm
Color	Blue
Tensile Strength	225.0 lbs per in / 40.0 N per mm
Cover/carcass material	XNBR/PE
Joining	Lacing, overlapped splice

NORTH CAROLINA

**2925 OLD STEELE
CREEK ROAD
CHARLOTTE, NC 28208
888-269-2358**

GEORGIA

**1606 ORCHARD HILL RD
LaGRANGE, GA 30240
800-822-64838**

WWW.BOWMANHOLLIS.COM