



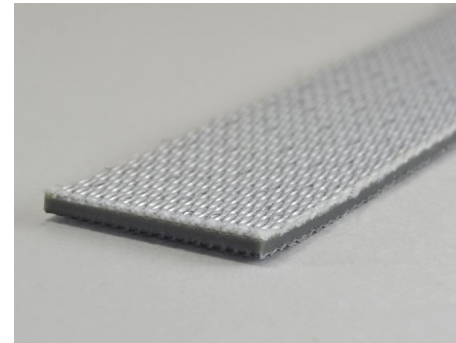

BH-123

Data Sheet

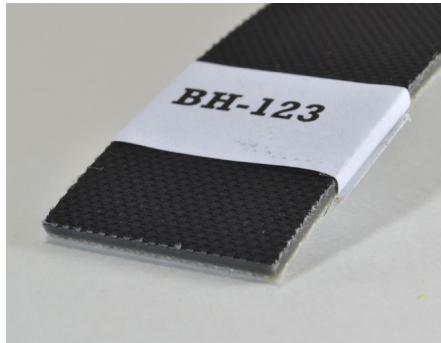

Description: 2 ply European belt, fabric bottom, low friction top

Applications: Accumulation, general conveying, merge belt

Features: Abrasion resistant cover, antistatic

Overall Thickness	0.08 inches / 2.1 mm
Minimum Pulley Diameter	1.2 inches / 32 mm
Color	Black
Tensile Strength	57.0 lbs per in / 10.0 N per mm
Cover/carcass material	Cross-linked TPU/PE
Joining	Finger splice, lacing

NORTH CAROLINA

**2925 OLD STEELE
CREEK ROAD
CHARLOTTE, NC 28208
888-269-2358**

GEORGIA

**1606 ORCHARD HILL RD
LaGRANGE, GA 30240
800-822-64838**

WWW.BOWMANHOLLIS.COM